

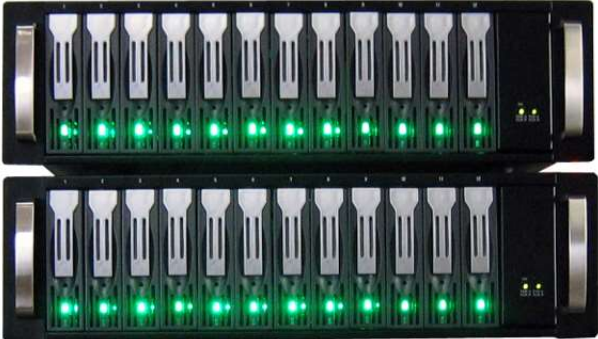
SAFEGUARD

HYBRID NVR

SafeGuard Hybrid is a complete video management system. Connect both IP cameras and analog cameras and interact with both seamlessly. The SafeGuard Hybrid NVR can record and manage all cameras up to 30 fps, Standard Definition , High Definition, and up to 4K.

Internal Storage customizable up to 42TB. Compatible with virtually all IP cameras*, from ONVIF to any stream based IP camera or encoder.

The remote and server software are visually and functionally similar, easy to learn, easy to use and 99% of what can be done locally can also be done remotely.


Supports All ONVIF Conformant IP Cameras and Encoders.	
Compatible with virtually any modern IP stream based cameras.	
Full featured remote software. Windows, Android and iPhone mobile apps.	
Fully customizable user access.	
Easy to use software. Similar look and functionality between server and client.	
Automatic discovery of many cameras, encoders and other Safeguard NVRs on the same network.	
Customizable case options.	
No annual maintenance fees or individual camera licenses. Each model supports a fixed number of cameras. Free to use the available channels for any camera, now or in the future. Cameras can be changed anytime.	

MPT | DIGITAL

SAFEGUARD

SAFEGUARD HYBRID NVR

MODELS	
SafeGuard NVR LT Hybrid	SafeGuard NVR XL Hybrid
1 to 36 Analog or IP Cameras up to HD resolution - 4TB to 8TB Storage – Small Desktop Chassis SGLTNVR8 – 8 Cameras, 4TB Storage SGLTNVR16 – 16 Cameras, 6TB Storage SGLTNVR32 – 32 Cameras, 8TB Storage	1 to 128 Analog or IP Cameras up to 4K resolution – Up to 42TB Storage – 3U Rackmount Chassis SGXLNVR 8 to 128 Cameras Up to 42TB Internal Storage

	FEATURES
	Support for virtually all modern IP cameras.
	User friendly software. Easy and quick setup.
	Software based hallway mode for any camera.
	Virtual camera support. Duplicate a portion of one cameras image and display it as a separate camera.
	Framerate, resolution and recording fully configurable.
	Full control over remote playback resolution to better manage bandwidth
	No individual camera license. Can change and replace any camera at any time.
	Unlimited remote clients. Remote software for Windows, Android, iPhone
	Remote Software License : Included Power : 100VAC, 250W, 2.5Amps** Operating Temperature : 5-40 Celsius Dimensions PC Chassis : 7"D x 17"D x 14" H 2U Chassis : 17"W x 15 3/4"D x 3 1/2" H 4U Chassis : 17"W x 18"D x 6 3/4" H

Equipment may not appear exactly as shown.

www.mptdigital.com

MPT Digital Inc.

2370 Midland Ave, Unit A10, Toronto, ON, M1S 5C6

Tel: 416.292.5285 – eMail: info@mptdigital.com

MPT | **DIGITAL**

SAFEGUARD